

6mm SMD 3-IN-1 Indoor LED Display

Indoor LED Visual Media Solution



Dakco Industrial Holdings Ltd.

Tel:86-755-29960601

Fax:86-755-29106150

Email:sales@dakco.cn




Best Solution For Indoor LED Media

Different from the traditional SMD 1-in-1 type, in SMD 3-in-1 LED display, each LED consists of red, green, blue diodes mounted on one chipset. So it performs better in color uniformity and consistency, video synchronization and stability, easy maintenance. In addition, the small size pixels make it possible to produce the high resolution LED display screens.




SMD 3-IN-1

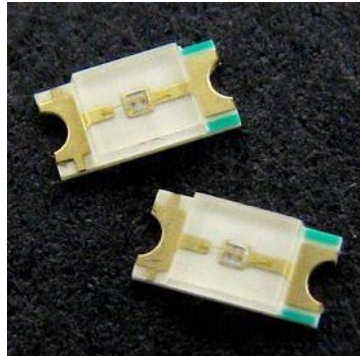

SMD 1-IN-1

The Level Up is improved in whole panel, Optimized to show a fine video image.


Level Up performs one of the determined factors of the LED display quality, especially for large size panel. In addition with the precise cabinet design and highest request of the vendor, Dakco manage the assembly procedure strictly. The smooth video in the display will be an eye-catcher, and provide the audience exclusively enjoyable visual experience.

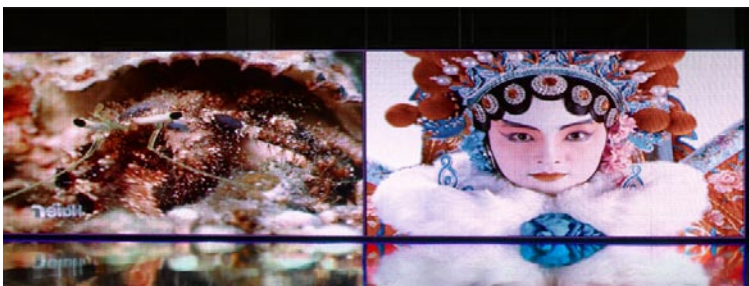

Chroma and Brightness Adjusted Pixel By Pixel




Dakco choose the most advanced system adjusting the chroma and brightness of LED display. Each LED is measured by the colorimeter, based on which, the application software calculate and optimize the adjusting modulus of each LED and pixel. When the modulus adopted in the video input signal, it results that the LED display performs symmetrically fine chroma and brightness in a define range of color.

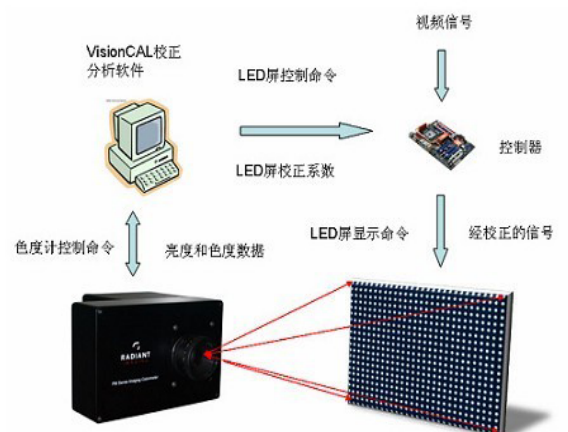

A Complete Display Solution

As a solution provider, Dakco supply customer with a plug and play LED display. The embedded controller allows for a fast set-up, easy operate, and full control over both video and data sources. Combined with Dakco's application software for display management and control, the Indoor LED Display products provide a complete solution for visualization in various indoor environments.

Wireless control method available.

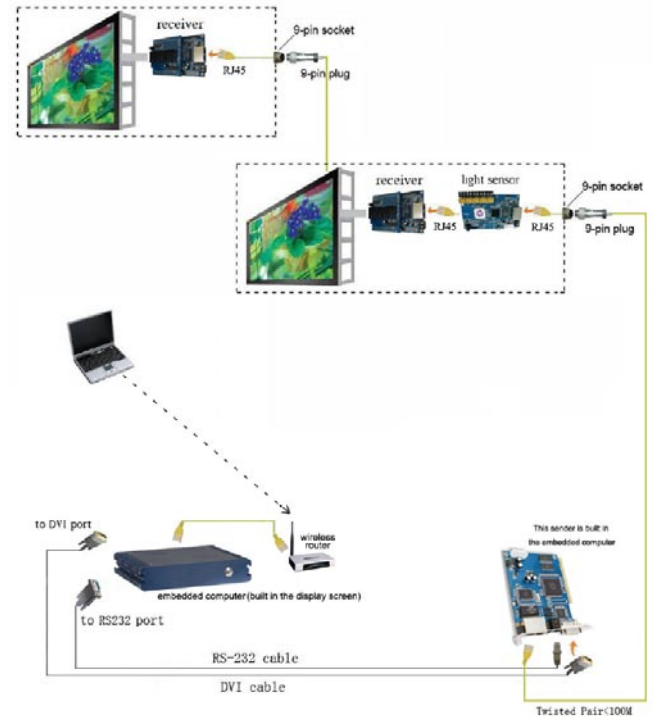



Application In Variety

Dakco 6mm 3-In-1 Indoor LED Display with the customized solution covers a full range of market application:

- Booth&Exposition
- Sports&Arenas
- Show&Entertainment
- Retail Venues
- Fashion&Stage
- Corporate lobbies
- Events



Specifications

| | | |
|--|---|---|
| Pixel pitch: 6mm |  | |
| Module resolution: 32pixel * 16pixel | | |
| Module size: 192mm * 96mm | | |
| Pixel configuration: 1R1G1B | | |
| Pixel density: 27777dots/sq.m | | |
| LED encapsulation: 3528 (SMD 3IN1) | | |
| Frame frequency: ≥60hz/s | | |
| Refresh rate: ≥400hz/s (≥1000hz/s available) | | |
| Cabinet resolution: 160pixel * 128pixel | |  |
| Cabinet size: 960mm * 768mm * 130mm | | |
| Cabinet weight: 25KG (Iron) | | |
| Best viewing distance: 3-40m | | |
| Best viewing angle: 160°horizontally and 120° vertically | | |
| Luminance: ≥2000cd/m ² | | |
| Greatest power consumption: 1000W/m ² | | |
| Grey scale: Displaying Colors≥16.7M(synchronous) | | |
| Input signal: RF, S-video, RGB, RGBHV, YUV, YC, COMPOSITION, etc | | |
| Control system: PCTV non-linear editing card + DVI display card + main controller card + optic fiber transmission (Optional) | | |
| Brightness adjustment: 256 levels of each color(R,G,B) manually, and 32 levels of each color automatically | | |
| Working voltage: 220V±10%, 110V±10% (can be customized) | | |
| Working environment temperature: -40°C~60°C | | |
| Average no failure time: >5000 hours | | |
| Malfunction dot rate: <0.0001 | | |
| Life-span: >100000 hours | | |

Recommended Options for Indoor LED Display



P7.62mm



P10mm

